



RRS  
BATTERY

LONG LASTING  
HIGH POWER  
RRS  
BATTERY



CODE	JIS GROUP	BCI GROUP	OLD JIS CODE	NEW JIS CODE	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
						C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
K8533062	NS40		NS40ZL	40B19L	12	36	29	54	300	360	400	330	197	128	225	0	3	B00	
K9533062	NS40		NS40Z	40B19R	12	36	29	54	300	360	400	330	197	128	225	1	3	B00	
K7543062	NS40		NS40ZLS	40B19LS	12	36	29	54	300	360	400	330	197	128	225	0	1	B00	
K9553062	NS40		NS40ZS	40B19RS	12	36	29	54	300	360	400	330	197	128	225	1	1	B00	
K2514002	NS60		N40L		12	40	32	61	350	420	470	360	236	128	225	0	3	B00	
K2524002	NS60		N40		12	40	32	61	350	420	470	360	236	128	225	1	3	B00	
K5524022	NS40				12	42	34	64	350	420	470	360	197	128	225	0	3	B00	
K6524022	NS40				12	42	34	64	350	420	470	360	197	128	225	1	3	B00	
K1534022	NS40				12	42	34	64	350	420	470	360	197	128	225	0	1	B00	
K7534022	NS40				12	42	34	64	350	420	470	360	197	128	225	1	1	B00	
K1594052	NS60		NS60L	50B24L	12	45	36	70	380	480	530	410	236	128	225	0	3	B00	
K6594052	NS60		NS60	50B24R	12	45	36	70	380	480	530	410	236	128	225	1	3	B00	
K3584052	NS60	51R	NS60LS	50B24LS	12	45	36	70	380	480	530	410	236	128	225	0	1	B00	
K4584052	NS60	51	NS60S	50B24RS	12	45	36	70	380	480	530	410	236	128	225	1	1	B00	
K2505102	N50	24R	N50L	48D26L	12	50	40	79	450	540	600	490	260	170	225	0	1	B00 11	
K3505102	N50	24	N50	48D26R	12	50	40	79	450	540	600	490	260	170	225	1	1	B00 11	
K6525152	D23	35			12	55	44	88	480	580	640	520	230	172	225	0	1	B00 11	
K8525152	D23	25			12	55	44	88	480	580	640	520	230	172	225	1	1	B00 11	
K4556102	NS60				12	60	48	98	470	560	620	500	236	128	225	0	3	B00	
K556102	NS60				12	60	48	98	470	560	620	500	236	128	225	1	3	B00	
K0576102	NS60	51R			12	60	48	98	470	560	620	500	236	128	225	0	1	B00	
K1576102	NS60	51			12	60	48	98	470	560	620	500	236	128	225	1	1	B00	
K2576102	D23	35	55D23L	55D23L	12	60	48	98	540	650	720	550	230	172	225	0	1	B00 11	
K3576102	D23	25	55D23R	55D23R	12	60	48	98	540	650	720	550	230	172	225	1	1	B00 11	
K4576102	N50	24R	N50ZL	55D26L	12	60	48	98	540	650	720	550	260	170	225	0	1	B00 11	
K5576102	N50	24	N50Z	55D26R	12	60	48	98	540	650	720	550	260	170	225	1	1	B00 11	
K9516052	N50	24R	NS70L	75D26L	12	65	52	108	580	700	770	620	260	170	225	0	1	B00 11	
K0526052	N50	24	NS70	75D26R	12	65	52	108	580	700	770	620	260	170	225	1	1	B00 11	
K2567002	N50	24R	NX110-5L	80D26L	12	70	56	118	620	740	820	680	260	170	225	0	1	B00 11	
K3567002	N50	24	NX110-5	80D26R	12	70	56	118	620	740	820	680	260	170	225	1	1	B00 11	
K4567002	N70	27R	N70L	65D31L	12	70	56	118	620	740	820	680	306	176	225	0	1	B00 11	
K5567002	N70	27	N70	65D31R	12	70	56	118	620	740	820	680	306	176	225	1	1	B00 11	
K0547052	N70	27R	N70ZL	75D31L	12	75	60	128	650	780	860	700	306	176	225	0	1	B00 11	
K7538002	N50	24R			12	80	64	138	650	780	860	700	260	170	225	0	1	B00 11	
K1538002	N50	24			12	80	64	138	650	780	860	700	260	170	225	1	1	B00 11	
K8538002	N70	27R	NX110-7L	95D31L	12	80	64	138	650	780	860	700	306	176	225	0	1	B00 11	
K9538002	N70	27	NX110-7	95D31R	12	80	64	138	650	780	860	700	306	176	225	1	1	B00 11	
K9569002	N70	27R	105D31L	105D31L	12	90	72	158	720	860	960	780	306	176	225	0	1	B00 11	
K0579002	N70	27	105D31R	105D31R	12	90	72	158	720	860	960	780	306	176	225	1	1	B00 11	
K4690002	N70	27R			12	100	80	179	800	960	1060	860	306	176	225	0	1	B00 11	
K4630102	N70	27R			12	100	80	179	800	960	1060	860	306	176	225	1	1	B00 11	

B01 Hold down is available for all types.

CODE	JIS GROUP	BCI GROUP	OLD JIS CODE	NEW JIS CODE	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
						C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
K9545102	N50	24R	N50L	48D26L	12	50	40	79	450	540	600	490	260	170	225	0	1	B00 11	
K3546202	N50	24R	N50ZL	55D26L	12	60	48	98	540	650	720	550	260	170	225	0	1	B00 11	
K2526052	N50	24R			12	65	52	108	580	700	770	620	260	170	225	0	1	B00 11	
K6507102	N50	24R	NX110-5L	80D26L	12	70	56	118	620	740	820	680	260	170	225	0	1	B00 11	
K8527002	N70	27R	N70L		12	70	56	118	620	740	820	680	306	176	225	0	1	B00 11	
K4577052	N70	27R			12	75	60	128	650	780	860	700	306	176	225	0	1	B00 11	
K3568002	N50	24R			12	80	64	138	650	780	860	700	260	170	225	0	1	B00 11	
K4568002	N70	27R	NX110-7L	95D31L	12	80	64	138	650	780	860	700	306	176	225	0	1	B00 11	
K7599002	N70	27R		105D31L	12	90	72	158	720	860	960	780	306	176	225	0	1	B00 11	
K2630102	N70	27R			12	100	80	179	800	960	1060	860	306	176	225	0	1	B00 11	

B01 Hold down is available for all types.



**JIS-SMF**  
for Japanese Passenger Cars



**JIS-MF**  
for Japanese Passenger Cars

CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
				C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
K4535002	L2	47	12	50	40	79	510	580	640	560	242	175	190	0	1	B13	24
K1505052	L2	47	12	55	44	88	510	580	640	560	242	175	190	0	1	B13	24
K7505052	LB2	90	12	55	44	88	510	580	640	560	242	175	175	0	1	B13	24
K1506022	L2	47	12	62	50	102	540	620	700	580	242	175	190	0	1	B13	24
K2506062	L3		12	66	53	110	560	650	720	610	277	175	190	0	1	B14	
K1507042	L3		12	74	59	126	640	760	820	700	277	175	190	0	1	B14	
K5507042	LB3	41	12	74	59	126	640	760	820	700	277	175	175	0	1	B14	15
K5620002	L5	49	12	100	80	179	860	980	1000	900	353	175	190	0	1	B13	24

Reverse polarity are available for all types.

CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
				C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
K6523062	L1B	99R	12	36	29	54	300	360	400	330	207	175	175	0	1	B13	24
K1524042	L1		12	44	35	68	400	460	510	430	207	175	190	0	1	B13	
K2554152	L1		12	45	36	70	400	460	510	430	207	175	190	0	1	B13	
K5554152	L1B	99R	12	45	36	70	400	460	510	430	207	175	175	0	1	B13	24
K1504052	L2B	90	12	45	36	70	400	460	510	430	242	175	175	0	1	B13	24
K8505002	L1		12	50	40	79	460	520	600	500	207	175	190	0	1	B13	
K7505002	L2	47	12	50	40	79	460	520	600	500	242	175	190	0	1	B13	24
K6515052	L2	47	12	55	44	88	510	580	640	560	242	175	190	0	1	B13	24
K9505052	L2B	90	12	55	44	88	510	580	640	560	242	175	175	0	1	B13	24
K8546002	L2	47	12	60	48	98	540	620	700	580	242	175	190	0	1	B13	24
K9516102	L2B	90	12	60	48	98	540	620	700	580	242	175	175	0	1	B13	24
K9506062	L3	48	12	66	53	110	560	650	720	610	278	175	190	0	1	B13	24
K4506062	L3B	91	12	66	53	110	560	650	720	610	278	175	175	0	1	B13	24
K4517022	L3	48	12	72	58	122	600	700	760	640	278	175	190	0	1	B13	24
K9547042	L3	48	12	74	59	126	640	760	820	700	278	175	190	0	1	B13	24
K8567052	L3	48	12	75	60	128	640	760	820	700	278	175	190	0	1	B13	24
K5567052	L3B	91	12	75	60	128	640	760	820	700	278	175	175	0	1	B13	24
K7508082	L5	49	12	88	70	154	740	850	900	790	353	175	190	0	1	B13	24
K1538082	L5B	93	12	88	70	154	740	850	900	790	353	175	175	0	1	B13	24
K0630002	L5	49	12	100	80	179	820	950	980	880	353	175	190	0	1	B13	24
K4670002	L5B	93	12	100	80	179	820	950	980	880	353	175	175	0	1	B13	24

Reverse polarity are available for all types.

CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
				C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
K5513062	L1B	99R	12	36	29	54	300	360	400	330	207	175	175	0	1	B13	24
K9504002	L0		12	40	32	61	330	380	420	360	175	175	190	0	1	B03	
K0534042	L1		12	44	35	68	400	460	510	430	207	175	190	0	1	B13	
K9514052	L1		12	45	36	70	400	460	510	430	207	175	190	0	1	B13	
K1524152	L1	26R	12	45	36	70	400	460	510	430	207	175	190	0	1	B14	11
K9544152	L1B	99R	12	45	36	70	400	460	510	430	207	175	175	0	1	B13	24
K4504152	L2B	90	12	45	36	70	400	460	510	430	242	175	175	0	1	B13	24
K3515002	L1		12	50	40	79	460	520	600	500	207	175	190	0	1	B13	
K0515002	L2	47	12	50	40	79	460	520	600	500	242	175	190	0	1	B13	24
K1515052	L2	47	12	55	44	88	510	580	640	560	242	175	190	0	1	B13	24
K0575052	L2B	90	12	55	44	88	510	580	640	560	242	175	175	0	1	B13	24
K2546002	L2	47	12	60	48	98	540	620	700	580	242	175	190	0	1	B13	24
K6566002	L2B	90	12	60	48	98	540	620	700	580	242	175	175	0	1	B13	24
K0516062	L3	48	12	66	53	110	560	650	720	610	278	175	190	0	1	B13	24
K5586062	L3B	91	12	66	53	110	560	650	720	610	278	175	175	0	1	B13	24
K8517022	L3	48	12	72	58	122	600	700	760	640	278	175	190	0	1	B13	24
K0517042	L3	48	12	74	59	126	640	760	820	700	278	175	190	0	1	B13	24
K7547052	L3	48	12	75	60	128	640	760	820	700	278	175	190	0	1	B13	24
K2547052	L3B	91	12	75	60	128	640	760	820	700	278	175	175	0	1	B13	24
K2507052	L4B	92	12	75	60	128	640	760	820	700	315	175	175	0	1	B13	24
K2528002	L4	94R	12	80	64	138	740	850	900	790	315	175	190	0	1	B13	24
K5528002	L4B	92	12	80	64	138	740	850	900	790	315	175	175	0	1	B13	24
K3528002	L4B	92	12	80	64	138	640	760	820	700	315	175	175	0	1	B13	24
K8508082	L5	49	12	88	70	154	740	850	900	790	353	175	190	0	1	B13	24
K1518082	L5B	93	12	88	70	154	740	850	900	790	353	175	175	0	1	B13	24
K9620002	L5	49	12	100	80	179	820	950	980	880	353	175	190	0	1	B13	24
K8620002	L5B	93	12	100	80	179	820	950	980	880	353	175	175	0	1	B13	24

Reverse polarity are available for all types.



	CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
					C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
EUROPEAN TYPE DIN/TT7 SMF	K8543062	L1B	99R	12	36	29	54	300	360	400	330	207	175	175	0	1	B13	24
	K6564152	L1		12	45	36	70	400	460	510	430	207	175	190	0	1	B13	
	K7564152	L1B	99R	12	45	36	70	400	460	510	430	207	175	175	0	1	B13	24
	K0504252	L2B	90	12	45	36	70	400	460	510	430	242	175	175	0	1	B13	24
	K1535102	L1		12	50	40	79	460	520	600	500	207	175	190	0	1	B13	
	K4585002	L2	47	12	50	40	79	460	520	600	500	242	175	190	0	1	B13	24
	K7565152	L2	47	12	55	44	88	510	580	640	560	242	175	190	0	1	B13	24
	K8565152	L2B	90	12	55	44	88	510	580	640	560	242	175	175	0	1	B13	24
	K8576002	L2	47	12	60	48	98	540	620	700	580	242	175	190	0	1	B13	24
	K6536202	L2B	90	12	60	48	98	540	620	700	580	242	175	175	0	1	B13	24
	K8576062	L3	48	12	66	53	110	560	650	720	610	278	175	190	0	1	B13	24
	K7576062	L3B	91	12	66	53	110	560	650	720	610	278	175	175	0	1	B13	24
	K0527022	L3	48	12	72	58	122	600	700	760	640	278	175	190	0	1	B13	24
	K3537042	L3	48	12	74	59	126	640	760	820	700	278	175	190	0	1	B13	24
	K9567052	L3	48	12	75	60	128	640	760	820	700	278	175	190	0	1	B13	24
	K1577052	L3B	91	12	75	60	128	640	760	820	700	278	175	175	0	1	B13	24
	K6578082	L5	49	12	88	70	154	740	850	900	790	353	175	190	0	1	B13	24
	K5578082	L5B	93	12	88	70	154	740	850	900	790	353	175	175	0	1	B13	24
	K4620002	L5B	93	12	100	80	179	820	950	980	880	353	175	175	0	1	B13	24
	K5620002	L5	49	12	100	80	179	820	950	980	880	353	175	190	0	1	B13	24

Reverse polarity are available for all types.

	CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
					C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
START STOP	K6526032	L2	47	12	63	50	104	560	650	720	610	242	175	190	0	1	B13	24
	K8516032	D23	35	12	63	50	104	560	650	720	610	230	172	225	0	1	B00	11
	K8557022	L3	48	12	72	58	122	650	750	830	700	278	175	190	0	1	B13	24
	K1508042	L4	94R	12	84	67	146	720	830	920	780	315	175	190	0	1	B13	24

Reverse polarity are available for all types.



	CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
					C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
TAXI	K4526032	L2	47	12	63	50	104	560	650	720	610	242	175	190	0	1	B13	24
	K3557022	L3	48	12	72	58	122	640	760	820	700	278	175	190	0	1	B14	
	K1567022	L3	48	12	72	58	122	640	760	820	700	278	175	190	0	1	B13	24

Reverse polarity are available for all types.

	CODE	DESIGN NUMBER	BOX TYPE	VOLT	CAPACITY (AH)				DIMENSIONS			WEIGHT +/-3 (Kg)	TERMINAL TYPE
					C20	C10	C5	C3	L	W	H		
DEEP DISCHARGE GEL	KEGY2104	25402021E	L1	12	40,0	38,1	35,2	32,5	203	175	167	15,6	A-S
	KEGY2105	25502106E	L2	12	50,0	46,4	41,8	39,3	241	175	167	18,0	A-S
	KEGY2106	25602160E	L3	12	60,0	56,8	52,3	48,9	278	175	167	21,3	A-S
	KEGY2108	25802034E	L5	12	80,0	73,9	67,8	64,7	353	175	167	27,7	A-S
	KEGY2159	25952015E	L6	12	95,0	87,1	78,4	74,2	395	175	167	30,5	A-S
	KEGY21001	26002108E	D2	12	100,0	88,9	79,6	75,8	344	175	210	32,9	A-S
	KEGY21021	26202054E	A	12	120,0	110,3	101,2	96,3	512	189	193	40,9	A-S
	KEGY21021	26202074E	D7	12	120,0	112,5	100,0	94,3	284	265	205	39,2	A-S
	KEGY21031	26302008E	D2H	12	130,0	121,7	111,8	102,1	344	175	262	41,3	A-S
	KEGY21051	26502061E	B	12	150,0	138,8	127,0	117,4	512	224	195	55,5	A-S
	KEGY21002	27002042E	C	12	200,0	185,8	169,3	155,2	515	273	213	71,5	A-S
	KEGY21532	27352001E	C	12	235,0	218,6	200,3	182,8	515	273	213	74,3	A-S
	KEGY8541	29452001E	GU	8	145,0	134,2	125,2	113,5	261	181	252	32,7	A-S
	KEGY6002	27002064E	GU	6	200,0	190,2	162,8	155,0	261	181	252	34,9	A-S



	CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
					C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
SHD HEAVY DUTY	K2678002	B	4D	12	180	144	360	1150	1300	1500	1250	513	223	223	3	1	B00	8
	K3750002	C	8D	12	200	160	407	1200	1360	1560	1310	518	276	242	3	1	B00	8
	K3741002	C	8D	12	210	168	432	1200	1360	1560	1310	518	276	242	3	1	B00	8
	K6742052	C	8D	12	225	180	468	1250	1410	1630	1360	518	276	242	3	1	B00	8
	K5704002	C	8D	12	240	192	505	1250	1410	1630	1360	518	276	242	3	1	B00	8

Reverse polarity are available for all types.

	CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN	HOLD DOWN (BCI)
					C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H				
HD HEAVY DUTY	K3529002	H3		12	90	72	158	600	680	780	650	324	175	227	0	1	B03	
	K6610052	H4		12	105	84	190	700	790	910	760	346	175	230	0	1	B03	
	K8620052	D2		12	105	84	190	700	790	910	760	349	175	235	0	1	B01	
	K3601002	D2		12	110	88	201	750	850	980	820	349	175	235	0	1	B01	
	K4601052	D2		12	115	92	212	800	900	1040	870	349	175	235	0	1	B01	
	K3672002	D4A		12	120	96	223	800	900	1040	870	513	189	223	3	1	B03	
	K2653052	D4A		12	135	108	256	900	1020	1170	980	513	189	223	3	1	B03	
	K4635002	B	4D	12	150	120	290	950	1070	1240	1040	513	223	223	3	1	B00	8
	K9636052	B	4D	12	165	132	324	1000	1130	1300	1090	513	223	223	3	1	B00	8
	K2608002	B	4D	12	180	144	360	1100	1240	1430	1200	513	223	223	3	1	B00	8
	K0720002	C	8D	12	200	160	407	1150	1300	1500	1250	518	276	242	3	1	B00	8
	K5741002	C	8D	12	210	168	432	1150	1300	1500	1250	518	276	242	3	1	B00	8
	K5722052	C	8D	12	225	180	468	1200	1360	1560	1310	518	276	242	3	1	B00	8
	K4704002	C	8D	12	240	192	505	1200	1360	1560	1310	518	276	242	3	1	B00	8

Reverse polarity are available for all types.

	CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN
					C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H			
BCI 31	K5519002	BCI31	31S	12	90	72	158	720	860	960	780	330	172	238	1	Stud	B00
	K7620002	BCI31	31A	12	100	80	179	800	960	1060	860	330	172	238	1	Stud	B00
	K2640002	BCI31	31A	12	100	80	179	800	960	1060	860	330	172	238	1	Std.	B00



SHD Heavy Duty



HD Heavy Duty



BCI 31

	CODE	DIN GROUP	BCI GROUP	VOLT	CAPACITY (AH)			CCA				DIMENSIONS			LAYOUT	TERMINAL TYPE	HOLD DOWN
					C20	C5	RC	A EN (-18°C)	CA (0°C)	HCA (22°C)	SAE (-18°C)	L	W	H			
MARINE	K3599002	H3		12	90	72	158	620	-	-	670	324	175	227	0	1	B03
	K7630052	H4		12	105	84	190	710	-	-	770	346	175	230	0	1	B03
	K4642002	D4		12	120	96	223	800	-	-	880	513	189	223	3	1	B03
	K9655002	B(D5)	4D	12	150	120	290	920	-	-	990	513	223	223	0	1	B00
	K0648002	B(D5)	4D	12	180	144	360	1050	-	-	1130	513	223	223	0	1	B00
	K6720002	C(D6)	8D	12	200	160	407	1130	-	-	1220	518	276	242	0	1	B00
	K0731002	C(D6)	8D	12	210	168	432	1150	-	-	1240	518	276	242	0	1	B00

	CODE	DESIGN NUMBER	BOX TYPE	VOLT	CAPACITY (AH)				DIMENSIONS			WEIGHT +-3 (Kg)	TERMINAL TYPE
					C20	C10	C5	C3	L	W	H		
GEL MARINE	KEGY21051	26502061E	B	12	150,0	138,8	127,0	117,4	512	224	195	55,5	A-S
	KEGY21002	27002042E	C	12	200,0	185,8	169,3	155,2	515	273	213	71,5	A-S
	KEGY21532	27352001E	C	12	235,0	218,6	200,3	182,8	515	273	213	74,3	A-S




MARINE




MARINE GEL

## FORM OF ASSEMBLY

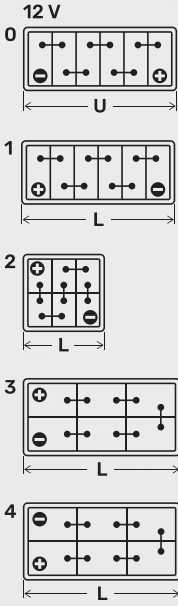


## CASING TYPES

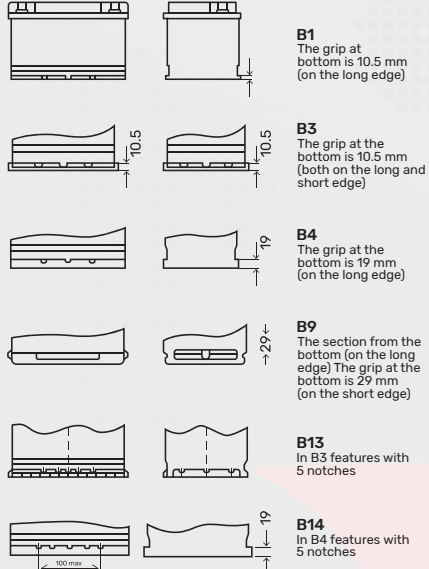


## TERMINAL TYPES










1 tapered terminal in compliance with DIN 72311 T.4



3 small-scale cambered terminals (Japanese type)



BCI 31 type terminal



SEGER SES ve ELEKTRİKLI GEREÇLER SAN. A.Ş.

Demirtaş Dumlupınar OSB  
Mustafa Karaer Cd. No: 22  
Osmangazi 16110 Bursa Türkiye

Tel +90 (224) 261 03 11

Fax +90 (224) 261 03 17

info@seger.com

www.seger.com



Korsa is a registered trademark of Seger A.Ş.